



WWW.SMITTYBILT.COM

Installation Instructions

Replacement Top (Part #
9870215, 9870211, 9870217)
1987-1995 Jeep Wrangler


NOTE: Read entire instructions thoroughly before installing this product. It is recommended to install this Top when temperatures are above 70 degrees. If the Top has any wrinkles this is caused from packaging but once the top relaxes they will go away.

You must have the factory bow assembly and components in order to install this product. It will not fit other aftermarket bow assemblies unless they are OE versions.



Step 1: In order to install this top you must have the complete factory bow assembly and hardware on your vehicle. If there is a top on your vehicle remove it at this time leaving all hardware on vehicle.

Step 2: With the rear spreader bar pulled down (Fig A) carefully lay your new top over the bow assembly. Slide the front plastic channel on the top into the windshield header on top of your windshield frame. (Fig B)

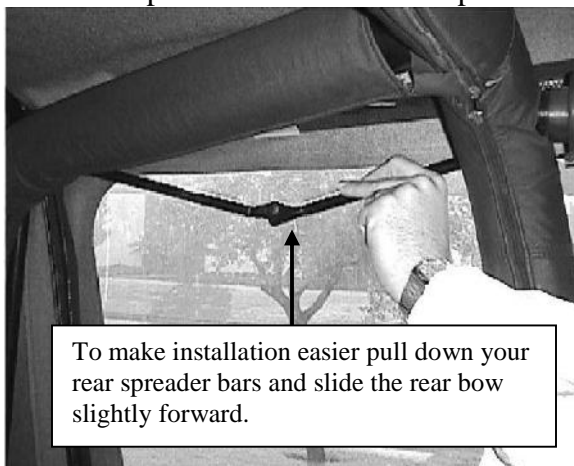

(Fig A)

To make installation easier pull down your rear spreader bars and slide the rear bow slightly forward.



(Fig B)

Insert channel on front of top into your factory windshield header.

For Technical Support/Warranty Information please call 310-762-9944

Smittybilt, 400 West Artesia Blvd, Compton, CA 90220



WWW.SMITTYBILT.COM

Installation Instructions

Replacement Top (Part #
9870215, 9870211, 9870217)

1987-1995 Jeep Wrangler

Step 3: Attach the snaps on the top to the center and rear bow assembly. (Fig C)




(Fig C)



(Fig D)

Step 4: Install the rear corners onto the vehicle by sliding the channel on the top into the factory channel on the vehicle. (Fig D)

Step 5: If windows are detached, attach them now to the top with the zippers. Starting at the top of either back side of the door, insert the channel on the side of the window into the vertical rail on the bow assembly. (Fig E)

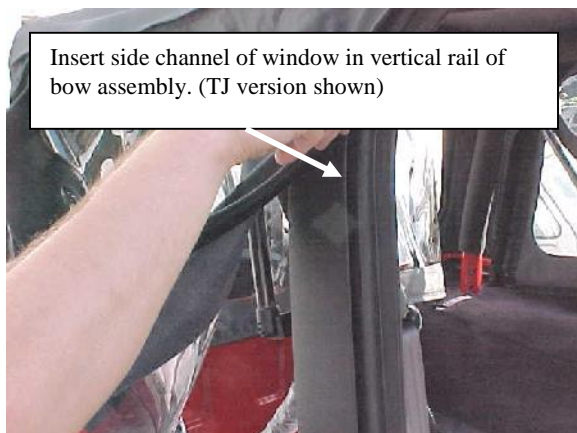

(Fig E)



(Fig F)

Step 6: Insert the channel on the bottom of the windows into the factory rail along the side of the vehicle (Fig F)

For Technical Support/Warranty Information please call 310-762-9944

Smittybilt, 400 West Artesia Blvd, Compton, CA 90220



WWW.SMITTYBILT.COM

Installation Instructions

Replacement Top (Part #
9870215, 9870211, 9870217)
1987-1995 Jeep Wrangler



(Fig G)



(Fig H)

Step 7: Fasten the snaps along the top rail above each door. The snaps on the rail slide in order to get proper alignment with the snaps in the top. (Fig G)

Step 8: Slide the factory tail gate bar along the channel sewn into the bottom of the rear window. (Fig H) Attach bar into the factory brackets located on each side of the tailgate. Insert bottom corners of rear window in channel.

Step 9: The top is now completely installed, push up the spreader bars that you lowered in Step 2. Installation is now complete. Proceed to Step 10 for upper door skin installation.

Step 10: Remove upper door skins from factory frame if needed. (Cutting may be involved) Lay down door skin on clean flat surface. Unfasten Velcro around window and on bottom.

Step 11: Insert the frame into the upper rear corner and then proceed to the upper front corner. (Fig I, J)



(Fig I)



(Fig J)

For Technical Support/Warranty Information please call 310-762-9944




WWW.SMITTYBILT.COM

Installation Instructions


Replacement Top (Part #
9870215, 9870211, 9870217)
1987-1995 Jeep Wrangler

Step 12: Insert the front lower corner into the door skin. (This is designed to be tight, unzipping the window may help ease installation.) Now proceed to the lower rear corner.

Step 13: Once frame is in door skin fold long flap over top bar of door frame then proceed to pull bottom flaps up and secure to upper flap with the Velcro. (Fig K, L)

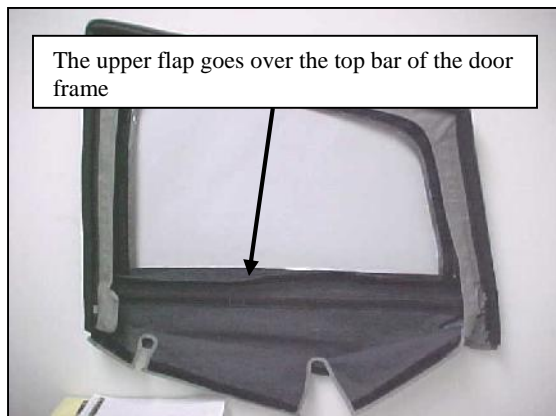

(Fig K)

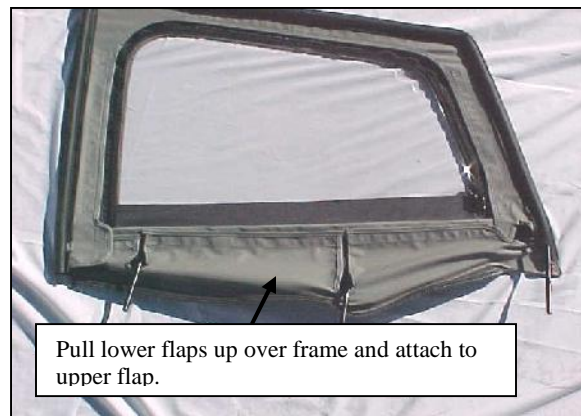

(Fig L)

Step 14: Insert door frame back into door. Attach channel on bottom of door skin into the factory door rail. If equipped connect front corner snap. Installation is now complete (Fig M)



(Fig M)

For Technical Support/Warranty Information please call 310-762-9944

Smittybilt, 400 West Artesia Blvd, Compton, CA 90220



WWW.SMITTYBILT.COM

Installation Instructions

Replacement Top (Part #
9870215, 9870211, 9870217)
1987-1995 Jeep Wrangler

Care and Maintenance

-**TOP**, The top should only be washed with soap and warm water. Do not use an abrasive cleaner or rag. Especially on the windows.

-**SNAPS**, Keep the snaps (if applicable) clean and silicone lubrication will help prevent them from sticking together.

-**SEAMS**, If seeps happen to occur in seams they can be treated with a Scotchguard type of spray. Patches can also be applied on the inside of the top in the case of a rip or tear.

-**Zippers**, Keep zippers clean and apply a silicone lubricant to them to help prevent damaged to them and keep them operating smoothly. Zipper heads can also be repaired if they happen to spread apart by using pliers to gently squeeze the head back together

Limited Warranties

Smittybilt's products are covered under the following limited warranties only. Note that the duration of the limited warranty differs according to the material and finish of the product purchased. Subject to the duration and conditions of the limited warranty stated below, Smittybilt warrants to the original retail purchaser that its products are free from defects in material and workmanship. All other warranties and representations express or implied, are hereby disclaimed, including fitness for merchantability and buyer's intended use or purpose. All parts are sold "AS IS" except for the limited warranties granted herein. Buyer assumes all risks as to the selection, suitability and performance of all goods and products selected. This limited warranty does not cover damage or impairment in any part due to misuse, improper installation, accident or contact with on-road or off-road hazards, product modification, improper or inadequate cleaning and/or maintenance. Smittybilt is not responsible for items damaged during shipping. This warranty is not transferable from the original buyer. For the original Buyer to be eligible for the limited warranty coverage, the Buyer must provide proof of purchase. Smittybilt strongly recommends returning the warranty registration card.

Customer's remedy hereunder shall be limited only to repair or replacement (at Smittybilt's option) of any defective part(s) returned to Smittybilt at customer's expense. The determination of whether or not a returned part is defective or subject to coverage under the limited warranties stated herein shall be made at Smittybilt's sole discretion.

To assure product quality, Smittybilt reserves the right to change product design, material, specification and finishes without prior notice to customers. This limited warranty gives you specific legal rights and you may also have other rights, which may vary from state to state. Some states do not allow limitations on how long an implied warranty lasts, so the above limitations may not apply as to you. Also, some states do not allow the exclusion or limitation of incidental or consequential damages, so the above limitations or exclusions may not apply to you. Smittybilt reserves the right to discontinue product lines and substitute products, or provide other remedies than those listed in this limited warranty for those discontinued products.

Warning

Rollover and other types of vehicle accidents may result in serious injury or death to you, your passengers and others sharing the road. Smittybilt accessories are decorative and are not intended to reduce or avoid injury or damage in the event of an accident. The weight and location of Smittybilt accessories may affect your vehicles' handling, stability and performance, creating an increased risk of accident or rollover. Before installing any accessory, check state laws and assure that the accessory will not obscure any lights or interfere with proper operation on your vehicle's safety equipment. Consult your owner's manual and the Smittybilt instructions, or additional safety information. Smittybilt products, nor the warnings contained herein, are not a substitute for your safe driving. Don't drink and drive, always use seat belts and don't drive faster than conditions permit.

For Technical Support/Warranty Information please call 310-762-9944

Smittybilt, 400 West Artesia Blvd, Compton, CA 90220