





Installation Instructions

DD-N-LJ04

Netting for Jeep TJ 2004 to 06
Unlimited model only

-Thank you for purchasing a Dirtydog 4x4 netting system. Please read these instructions fully to familiarize yourself with the installation. You should have 3 main pieces. Right side, left side, and backside. Set aside 30 minutes for the first time you install your netting. Installation is done easiest with the hard top removed. The soft top

Start with either side . To identify right and left. The dirtydog logo faces out. Loosely install 8 straps (see arrows). Please note that the plastic ladderlocs will face the inside of the Jeep and not the outside as shown. Tighten all the straps so netting is equally spaced and straight. Repeat the same procedure for the opposite side. The top loops will get installed when the top net is installed

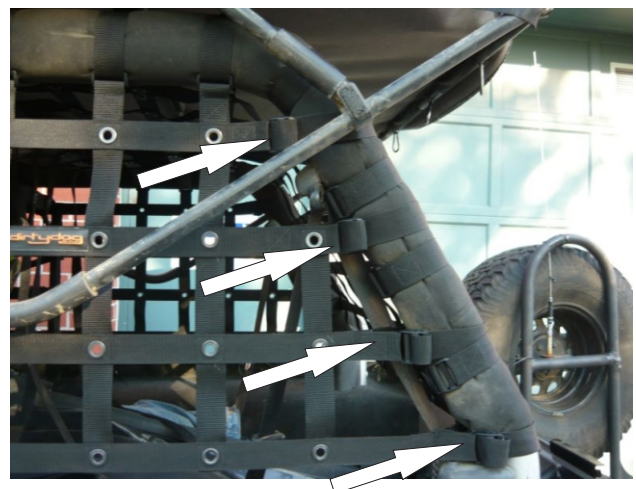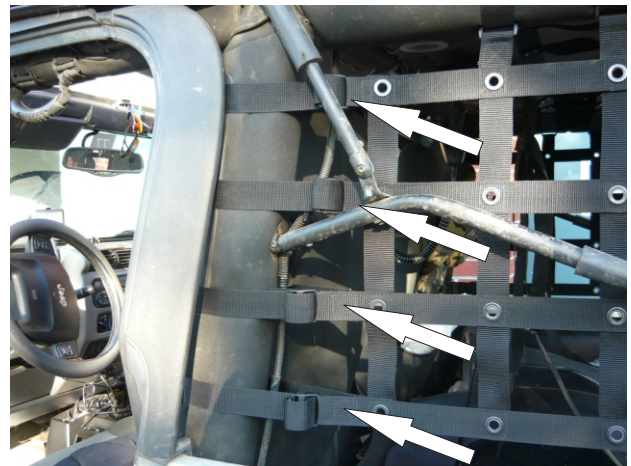

Rear section installation. Start at the back with the rear buckles. The two bottom straps attach to the very bottom buckle that was installed with the sides the next ones get installed with the straps provided. Attach all 8. Tighten and adjust as necessary. Finish by installing the balance of the straps along the top. There are 5



The last strap at the very top wraps around the roll bar and comes out the side to attach to the buckle off the side



Your net comes with a 3 year warranty against manufacturing defects. Cuts, abrasions, sun faded items are not covered under the warranty.

Dirtydog 4x4
3045 Southcreek Road
Mississauga, ON
Canada
855-704-0708
Question? Call or email orderdesk@dirtydog4x4.com